

1 Phase VAP Protector



V Voltage
A Current
KWh Power


M Menu Selection
▲ Digit +
▼ Digit -
ON/OFF

User Manual


Technical Specs

Parameter	Specification
Input Voltage	AC 230V
Max Operating Current	63A
Frequency	50/60Hz
Power-On Delay Time	1s – 300s (Default: 5s)
Overvoltage Setting	230V – 300V (Default: 270V)
Undervoltage Setting	140V – 210V (Default: 170V)
Overcurrent Setting	1A – 63A (Default: 63A)
Altitude	≤2000m
Operating Temperature	-25°C ~ +50°C
Humidity Tolerance	≤50% at 40°C (without condensation)
Storage Temperature	-25°C ~ +55°C
Weight	160g
Dimensions	81 × 36 × 66mm

Wiring

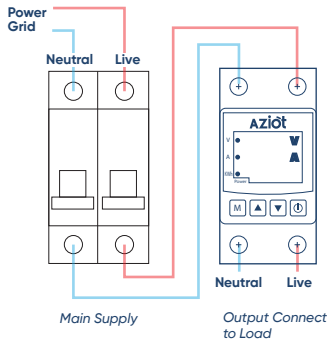

Setup Menu

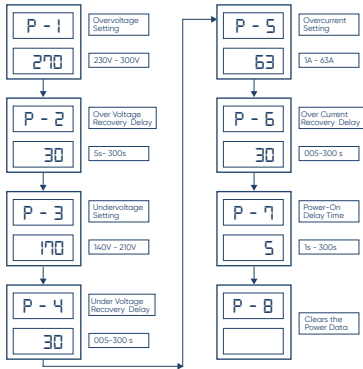

Benefits



Surge
Protection



Over and Under
Voltage Protection



Monitors
Real-Time Power



Customer Support

Customer Care : +91 88866 35918

support@aziot.life



Website: www.aziot.life

Follow us on: Aziot.life