


2-Way Smart Touch Switch User Manual




1 SETTING UP SMART TOUCH SWITCH

It is smart Wi-fi enabled device that lets you control your lights & electronic devices from your Smart Phone from anywhere at any time.

AC Specifications	
Operating Input Power Range	220-240 VAC, 50 Hz
Maximum Load Per Output	Incandescent: 16 A Per Output LED Light : 500W or 5 Lights per Output. LED Strip/Profile : 500W-Max 10 meters. AC : Up to 1 Ton per Output. Geyser : Up to 1500 Watt per Output. Motor : Single Phase 1HP per Output.
General Specifications	
Power Consumption when loads off	<0.2W
Power Consumption when loads on	<1.0W
Touch Surface Raise Temperature	10°C to 30°C
Working Temperature	-10°C to 70°C
Relative Humidity	Operating 5%RH to 95%RH Non-Condensing. Storage 5%RH to 95%RH Non-Condensing
Dimensions	92mm x 51mm x 23mm
RF Frequency	2.4 GHz

2 2-WAY SWITCH BOARD CONNECTIONS


2-way switch board connection allows you to control one light from two different Switch board locations using two SPDT switches.



In the above 2 connections, the Load-1 and Load-2 can be control from Switch Board - 1 and Switch Board - 2.

3 SETTING UP SMART TOUCH SWITCH


The 2-Way Smart Touch Switch should be installed in the switch board where the Loads are connected with few changes in the existing connections.



4 SETTING UP SMART TOUCH SWITCH

Check the Wi-Fi signal strength at the switch board, signal strength should be good and greater than -50dBm, If it is less-than -50dBm then adjust router near to switch board.

Open the Switch board top cover, where the loads are connected in 2-Way wiring. Remove the Load connections from the switch board, remove and isolate the extra 2-Way wire coming from the other end of 2-Way Switch Board.

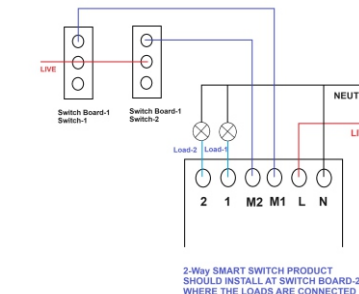

5 SETTING UP SMART TOUCH SWITCH

1. Download the SmartLife app on to your smartphone. This app available for both iOS and Android devices.



2. Connect your mobile to 2.4 Ghz Wi-Fi network.
3. Enable the Location & Bluetooth in your mobile.

4.After connecting the device, long press any switch for 7-8 seconds until the Blue LED in the middle of the product starts blinking continuously. Which means the device is in the Pairing Mode.

- 5.Tap the icon "+" on the top right corner of the 'Smart Life' App, then select Auto Scan, and the device will be automatically discovered and click 'Go to add' on the prompt.

- 6.Tap the icon "+" besides the bluetooth device.


6 SETTING UP SMART TOUCH SWITCH

- 7.Follow the app instructions to connect the 2-Way Smart Touch Switch to your Wi-Fi network

- 8.Once connected, the app will prompt the connection, and click 'Done'

- 10.Now control the loads through the 'Smart Life' App.

11.Once the configuration is completed successfully, the indicator light will turn off, and the device will be added to the 'Device List'. If the network is disconnected then indication will be solid Blue.

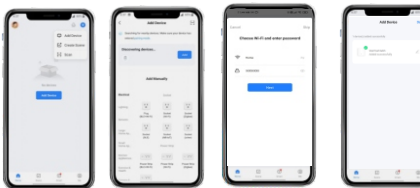

7 CONNECTING TO VOICE ASSISTANT

Search and enable "Smart Life" Skill in Alexa and Google Home. Follow the on-screen instructions to complete the Voice Assistants Setup.

