

Smart Handle Lock

User Manual

Dear user, Thank you for purchasing the smart door lock

To improve the quality survival with innovative technology, to create the world's most outstanding, most innovative products so that enterprises become the industry benchmark. We always adhere to the "quality survival, service and development" business philosophy. In the intelligent lock industry, all constantly improve the product quality system. our company keep up with the pace of the times. We always walk in the forefront of the industry, and always steadfastly protects the people's property safety! From products to service, we always pursue to provide you with a full range of intimate and comfortable service! Thank you for your support for smart door lock!

Installation Steps

STEP 1:



Pass the square along the wire

STEP 2:



Choose the screw of the corresponding length according to the thickness of the door and tighten the screws

STEP 3:



Open the battery cover to install the battery

STEP 4:



Install the deadbolt

STEP 5:



2 The hole position can be adjusted according to the door lock position

STEP 6:



Install and fix the door handle

STEP 7:



Connect door lock circuit board port

STEP 8:




Tighten the screws securing the battery cover



1 Pay attention to the direction of the lock tongue when you installing

After completing the above steps, the door lock installation is complete

FINGERPRINT LOCK INSTALLATION INSTRUCTIONS



Device Configuration:

The smart handle door lock is equipped with two buttons:

- **S1 Button:** Located visibly on the door handle, this button allows you to unlock the door from inside the home.
- **S2 Button:** This button is concealed inside a small hole on the door handle.

Entering Configuration Mode:

To put the device into configuration mode, press and hold the **S2** button for **5 seconds**. You will hear **five short beeps**, and the handle will display a **red light indicator**, confirming that the lock is now in configuration mode.

Once in configuration mode, you can proceed with the setup using the **Smart Life App**

Download SmartLife App from Android Playstore or App Store



Packing List

Open the product package. Check that the following accessories are included.

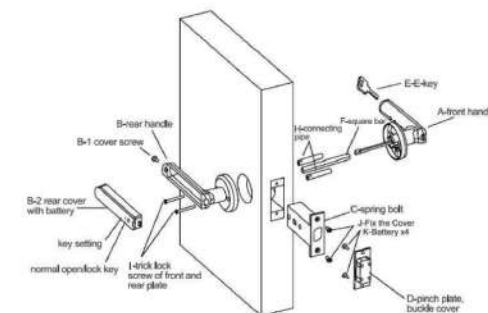


Diagram of Door Lock Installation

.APP registration, login




APP registration choose to register if without an APP account or log in through SMS verification code.

Click "Sign-Up" to enter the account registration page. Get SMS verification code and set password according to the prompt.

If you already have an existing account, you can click "Log In" to login in to the app.


Enable the Location and Bluetooth in your mobile.

1. Add bluetooth door lock

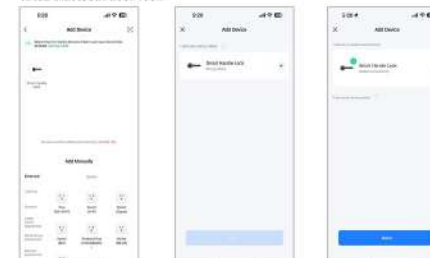


1. Tap the icon "+" on the top right corner of the "Smart Life" App, then select Auto Scan, and the device will be automatically discovered and click "Go to add" on the prompt.
2. Tap the icon "+" besides the bluetooth device.
3. Follow the app instructions to connect the Smart Handle Lock to your Bluetooth.
4. Once connected, the app will prompt the connection, and click "Done".

II. Member management-family member management



1. Validity period: once added, the permission of family members is permanent until the administrator deletes the member, and the members always have the corresponding permission.
2. Door opening method: The administrator can decide the permission type of the member. As shown in the figure, if the administrator does all the door opening permissions of the member, the user can no longer maintain his own door opening mode through APP, and can only use the existing door opening mode.
3. Create/Delete the door opening mode. By connecting the door lock with APP Bluetooth, the administrator can create/delete the door opening for other family members.

III. Member management-other member management



1. Validity period: the administrator can decide the length of validity period of other members. It can be set as permanent or set the specified start time-end time.
2. Door opening mode: the administrator can decide the permission type of the door opening mode possessed by the member. As shown in the figure, if the administrator does all the door opening permissions of the member, the user can no longer maintain his own door opening mode through APP, and can only use the existing door opening mode.
3. After creating another member, the administrator can associate the member with a certain user of APP by "sharing". When the specified end time of the user arrives, the user's APP will automatically lose the device.

4. Emergency Unlock

Method 1:

STEP 1:



Plug the USB power cord into the connector

STEP 2:



Press the registered administrator fingerprint

STEP 3:



Unlocking is successful

Useful Tips

1. Keep at least one key out of the door for emergency.
2. When the battery is low, the indicator will blink red light. The rest power could only be used for about 50 times.
3. When the battery is out of power, you can unlock the door with key, or supply the lock with power through the micro-USB and use fingerprint or password to unlock it.
4. Use alkaline batteries to prevent the damage by battery leakage. Batteries must be replaced every 2 years.

Product Parameters

1. Number of Fingerprints - 50
2. Number of Passwords - 100
3. Power Supply - 4 AAA 1.5V Alkaline Batteries.

IV. Fingerprint management



1. Select "Member Management".
2. Click on the "User".
3. Add the Fingerprint.

V. Password management

1. Select "password management" as the entry of the home page.
2. Before adding a password, select the user corresponding to the password to be added.
3. Click "Add Password" to enter the password entry interface, which supports random generation and user-defined passwords.
4. Connect the door lock through APP Bluetooth, and the administrator can enter the password for himself or other family members.

VI. Door opening record.

The log can be queried in the "Door Opening Record" entry of the homepage, and the records are arranged in reverse order. The unlocking ID that has been associated with the user name will directly display the corresponding user name, and the unlocking ID that has not been associated with the name from the APP will display the specific unlocking ID. About the record of door opening: when the door lock is connected with Bluetooth of mobile phone, the record of door opening will be displayed on APP in real time; otherwise, the record will be cached locally in the door lock, and it will be retransmitted after the door lock is connected with Bluetooth of mobile phone and opened next time.

VII. Restore the factory settings

Click the icon in the upper right corner of the main page, enter the interface, find "Remove device" and select "Unbind and clear data".

1. When the mobile phone APP is connected to the door lock by Bluetooth, the factory reset operation is used. All door opening methods of the door lock will be deleted, and the door lock will be restored to its original factory default state. Other users can re-add the door lock through APP.

3. Press the setting button in the small hole of the rear handle for 5 seconds, and the door lock will make a long "ding" sound, which will force the factory settings to be restored. All the door opening methods on the door lock will be deleted, and the door lock will be restored to its original factory default state. Other users can add the door lock again through APP.

④

Useful Tips:

1. Keep at least one key out of the door for emergency.
2. When the battery is low, the indicator will blink red light. The rest power could only be used for about 50 times.
3. When the battery is out of power, you can unlock the door with key, or supply the lock with power through the micro-USB port and use fingerprint or password.
4. Use alkaline batteries to prevent the damage by battery leakage. Batteries must be replaced every 2 years.

Q&A:

Q: The button doesn't respond and light doesn't light up?

A: Check the cable if it connects to the right way or it's loose. After this it still can't work, normally it's the battery dead. It needs to change the batteries (4*1.5V AAA battery), or pull out the inner back cover and insert it again.

Q: Which model of the door can install the fingerprint door lock?

A: There is no limit. If the door thickness more than 3.5cm-6.5cm then it can install.

Q: How to restore the factory settings?

A: Long click the setting button 5s, the blue light will shine and have the beep sound. After 5s will have the red light shining and have a voice reminder "Initial success", This means successful.

Q: What is the initial password if the fingerprint lock is restored to the factory setting?

A: Initial password is "1234567#"

Q: How to do if the lock runs out of the battery?

A: Use the power bank to connect the USB port to charge then use the key to open the door.

Q: How to do if you forget the password?

A: Use the fingerprint or key to unlock the door and then restore the factory settings to reset the password.

Other Settings

1. Two Ways to Reset and Delete All the Users

Method 1:

STEP 1:



Long press the small hole on the inside handle with a small screwdriver for 9 seconds

STEP 2:



When the indicator blinks red light, stop the operation, the reset is successful


Method 2:

STEP 1:



Enter "888*#", and the indicator will blink red light

STEP 2:



Press the registered administrator fingerprint, the reset is successful

2. Two Ways to Turn ON Normally- Open Mode

Method 1:

STEP 1:



Long press the button on the inside handle for 1 second

STEP 2:



When the indicator light turns Blue, release the button

Method 2:

STEP 1:



Touch to wake up the password area

STEP 2:



Enter "28*#", and the indicator will blink Blue light



STEP 3:



Press the registered administrator fingerprint

3. Four Ways to Turn OFF Normally-Open Mode

- a. Repeat the above 2 methods to turn off the normally open mode
- b. Press *# to lock and turn off the normally open mode
- c. Enter an enrolled fingerprint or password to lockup

⑤

Aziot
It's all about Automation

Customer Care: +91 88866 35918 / support@aziot.life

Website: www.aziot.life

Follow us on: [Aziot.life](https://www.aziot.life)



⑥

⑦