


4 WAY SMART MULTI-PLUG

USER MANUAL



1 SETTING UP 4 WAY SMART MULTI-PLUG

The 4 Way Smart Multi-Plug is a Wi-Fi-enabled device that allows you to control your electronic devices remotely from your smartphone, anytime and anywhere.

AC Specifications	
Operating Input Power Range	90VAC-264VAC±5%, 47-63Hz.
Maximum Load	6Amp Max @ 230VAC Input
General Specifications	
Power Consumption	<0.2W no load <1.0W Loaded.
Temperature	Operation 0°C to +50°C. Storage -20°C to +70°C.
Relative Humidity	Operating 5%RH to 95%RH Non-Condensing. Storage 5%RH to 95%RH Non-Condensing.
Dimension	121mm x 59mm x 70mm
Product Net Weight	130 Grams
Wi-Fi Frequency	2.4 GHz
Surge Capacity	2.5 KV
Enclosure Material	ABS Plastic
Compliance	RoHS
Over Voltage and Under Voltage Protection	When the input supply exceeds 275V or drops below 85V AC, the smart plug automatically turns off the load. It can only be turned back on through app control or manual operation.
Over Load Protection	When the load exceeds 10.5 amps, the smart plug automatically turns off the load. It can only be turned back on through app control or manual operation.

2 SETTING UP 4 WAY SMART MULTI-PLUG

1. Download the SmartLife app onto your smartphone. This app available for both iOS and Android devices.



2. Connect your mobile to 2.4 GHz Wi-Fi network.

3. Enable the Location & Bluetooth in your mobile.


3 SETTING UP 4 WAY SMART MULTI-PLUG

4. After connecting the device, press and hold the config button for 6 seconds or press and release the button 7 times in 3 seconds duration until the indication RED LED Blinks rapidly.

5. Open the SmartLife App in your mobile.

6. Tap the icon "+" on the top right corner of the 'Smart Life' App, then select Auto Scan, and the device will be automatically discovered and click 'Go to add' on the prompt.

7. Tap the icon "+" besides the bluetooth device.

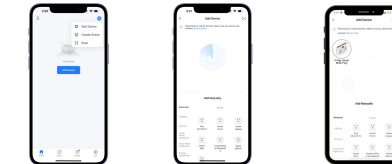


4 SETTING UP 4 WAY SMART MULTI-PLUG

8. Follow the app instructions to connect the 4 WAY SMART MULTI-PLUG to your Wi-Fi network.

9. Once connected, the app will prompt the connection, and click 'Done'.

10. Now control the 4 Way Smart Multi-Plug through the 'Smart Life' App.

11. Once the configuration is completed successfully, the indicator light will turn off, and the device will be added to the 'Device List'.

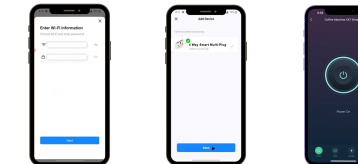

5 CONNECTING TO VOICE ASSISTANT

Search and enable "Smart Life" Skill in Alexa and Google Home. Follow the on-screen instructions to complete the Voice Assistants Setup.

